
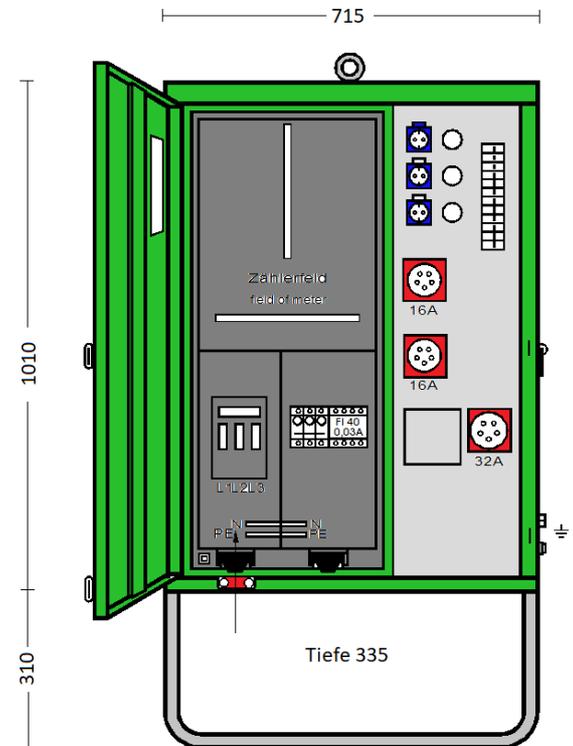


<b>Connection distribution cabinet</b>	
Connected load: 22 kVA; 230/400V, 50Hz Protection class: open/closed IP 21/44 Weight approx. 53 kg, AV 1 housing	
with enclosed base frame, UAV 1 with mounted safety accessories.	
<b>Made in Germany</b>	
Art.-/Ref.-No:	<b>183240</b>
Typ/Type:	<b>AV 32N/A/321-1</b>

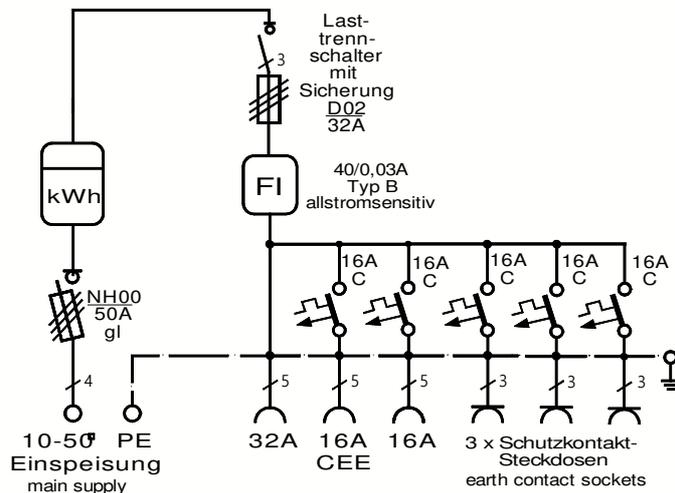

**ELEKTRA** - Connection distribution box in galvanised sheet steel housing, powder-coated RAL 6018, equipped with:

- 1 connection as fuse switch-disconnector size NH00 / 50A
- 1 meter position according to DIN/VDE 43868/1 (without meter)
- 1 main switch as load-break switch with fuses size D02/32A (lockable with padlock)
- 1 RCD RCD 4-pole, 40 A, I $\Delta$ N = 0.03 A, type B, all-current sensitive
- 1 CEKON socket outlet 5-pin 32 A directly from RCD
- 2 CEKON socket outlets 5-pin 16 A via Circuit breaker 16 A, 3-p C
- 3 earthed socket outlets 16 A via Circuit breaker 16 A, 1-p C

Dimensions and illustrations are non-binding. We reserve the right to make design changes.